


# Termination

WA1426

DC – 8.5 GHz

50 WATTS

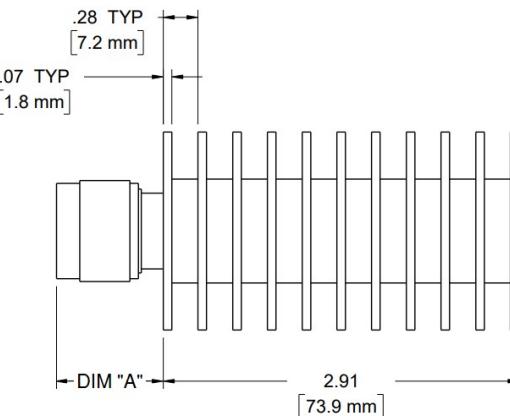

## Features

Type N, TNC, or SMA stainless steel M/F connector per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position.

## Specifications

**Nominal Impedance:** 50 ohms.

**Frequency Range:** DC - 8.5 GHz.

**Power Rating:** 50 W maximum average rated power to 25°C ambient temperature, de-rated linearly to 2.5 W at 125°C. 5 kW peak power (5  $\mu$ sec pulse width, 0.5% duty cycle).

**Temperature Range:** -55°C to +125°C.

**Construction:** Black aluminum alloy body with passivated stainless steel connectors. Gold plated beryllium copper or stainless steel contacts. RoHS Compliant.

**Calibration:** VSWR performed across frequency range. Calibration test data available at additional cost.

### Maximum VSWR:

| Frequency (GHz) | VSWR WA1426 |
|-----------------|-------------|
| DC - 4.0        | 1.2         |
| 4.0 - 8.5       | 1.3         |

### Dimensions:

| Connector Type (- code) | Length        |
|-------------------------|---------------|
|                         | Dimension 'A' |
| SMA F -01               | 9.8 (.39)     |
| SMA M -02               | 10.9 (.43)    |
| N-Type F -03            | 14.9 (.59)    |
| N-Type M -04            | 22.7 (.89)    |
| TNC F -05               | 14.4 (.57)    |
| TNC M -06               | 17.7 (.70)    |
| 7/16 DIN F -07          | 30.5 (1.2)    |
| 7/16 DIN M -08          | 31.8 (1.25)   |

**Weight:** .28 (9.88)  
**Diameter:** 38.1 (1.5)

*Note: Dimensions are given in mm (in), or kg (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.*

**Low Intermodulation Option:** Add -LIM after connector option to specify low intermodulation attribute.