


Termination

WA1451

DC - 8.5 GHz

500 WATTS

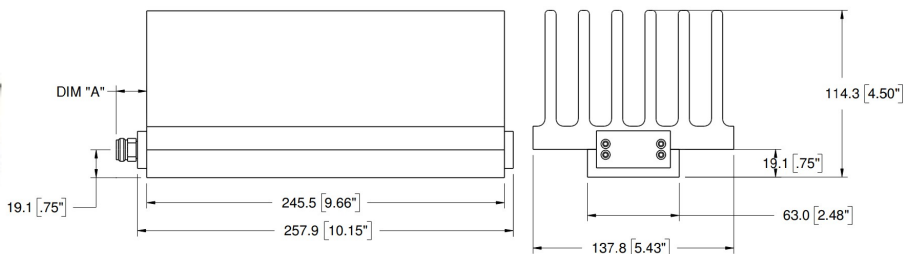

Features

Type N or 7/16 DIN stainless steel M/F connector per MIL-STD-348A, interface dimensions mate nondestructively with MIL-PRF-39012. Designed to meet MIL-DTL-3933 environmental specification. Unit may be mounted in any position.

Useable to 10 GHz.

Specifications

Nominal Impedance: 50 ohms.

Frequency Range: DC - 8.5 GHz.

Power Rating: 500 W maximum average rated power to 25°C ambient temperature, de-rated linearly to 30 W at 125°C. 5 kW peak power (5 µsec pulse width, 5% duty cycle).

Temperature Range: -55°C to +125°C.

Construction: Black aluminum alloy body with passivated stainless steel connector. Gold plated beryllium copper or stainless steel contact. RoHS Compliant.

Calibration: VSWR performed across frequency range. Calibration test data available at additional cost.

Low Intermodulation Option: Add -LIM after connector option to specify low intermodulation.

Maximum VSWR:

Frequency (GHz)	VSWR
	WA1451
DC - 4.0	1.25
4.0 - 8.5	1.45

Dimensions:

Connector Type (- code)	Length
	Dimension 'A'
N-Type F -03	14.9 (.59)
N-Type M -04	22.7 (.89)
DIN 7/16 F -07	30.5 (1.2)
DIN 7/16 M -08	31.8 (1.25)

Weight: 3.7 (130.5)
Height: 114.3 (4.5)
Width: 137.8 (5.43)

Note: Dimensions are given in mm (in), or kg (oz). Weight figure is nominal, with our standard connector configuration. Additional connector options may be available.